EURECOM
Sophia Antipolis

OPEN AIR INTERFACE

OpenAirInterface 5G Core Network: Status and Roadmap

Tien Thinh NGUYEN, Franck MESSAOUDI, Lionel GAUTHIER, Sagar ARORA, Stefan SPETTEL, Lukas ROTHENEDER, Tariro MUKUTE, Shubhika GARD

OSCAR Workshop, Jun 2025

OAI 5G CN Project Group

- Website: https://openairinterface.org/oai-5g-core-network-project/
- Git repository: https://gitlab.eurecom.fr/oai/cn5g
- Main contributors: EURECOM/OAI, BUPT, Phine.tech

OAI 5G CN – Current Status (1)

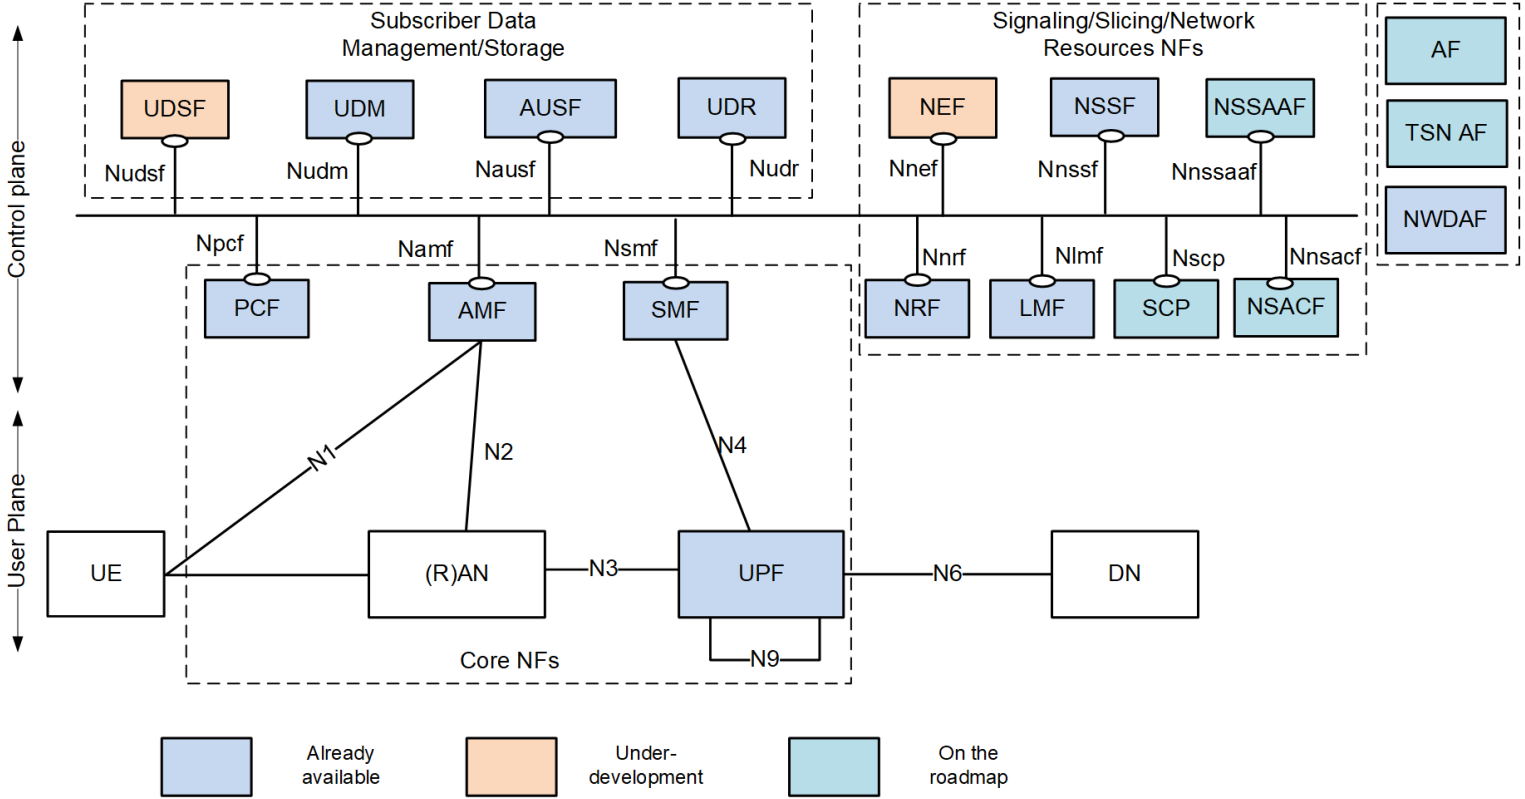

OAI 5G CN – Current Status (2)

- **Solid and functional 5GC**
  - Basic procedures (with multiple UEs/PDU sessions): connection and registration procedures (UE registration/de-registration, service request), session management procedures (PDU session establishment, modification, release)
  - Basic features: NF registration, NF discovery, HTTP1/2, FQDN
- **Advanced features**
  - Event exposure services for SMF (7 events), AMF (6 events), UDM/UDR (on-going)
  - Network slicing with NSSF and multiple AMFs
  - Support of Location services (AMF and LMF)
  - QoS support for both control and data plane
  - Static UE IP address allocation
  - Customize APIs for User provisioning, for configuring NFs on the fly
  - Multiple UPFs in the same data path/Support UL Classifier
  - N2 handover

OAI 5G CN – Current Status (3)

- **Different flavors**
  - Three 5GC modes
    - Minimalist 5GC with AMF, SMF, UPF and NRF (deprecated)
    - Basic 5GC with AMF, SMF, UPF, NRF, UDM, AUSF and UDR
    - Full 5GC with AMF, SMF, UPF, NRF, UDM, AUSF, UDR, PCF, NSSF and NWDAF
  - Two options for database: MySQL and MongoDB
  - Three UPF flavors:
    - UPF Simple-Switch
    - eBPF/XDP
    - VPP-UPF (relying on VPP-Travelping, with DPDK support, soon to be deprecated)
- **Deployment options**
  - Traditional/classic deployment on Servers/Virtual machines
  - Automated deployment of NFs in Docker containers using Docker-Compose
  - Cloud-native deployment using Helm Chart (on OpenShift cluster)

OAI 5G CN – Current Status (4)

- **Functional validation**
  - OAI gNB/OAI UE, COTS UEs (Rel 15/16 UEs e.g., Quectel/SIMcom modules (including RM520-GL, RM502Q-AE), Iphone 14/14 Pro/15/15 Pro, Huawei P40/P40 Pro, Pixel 5/6/7, One Plus 8/9, etc), Amarisoft UE
  - Open-source RAN simulators (gNBSim, UERANSIM, My5g-RANTester, Omec-gnbsim)
  - Commercial gNBs/ COTS UEs
  - In house “NGAP/NAS tester” (not open source)
  - Commercial testers
- **Performance validation**
  - Support 5000+ UEs with traffic
  - UPF:
    - UPF Simple-Switch: 800Mpbs UL/DL with Dockers, 1Gbps UL/DL with bare-metal
    - eBPF/XDP: 100Gbps DL/UL with bare-metal

Roadmap (1)

- **Stabilizing OAI CN and improving performance**
  - Improving the code quality of OAI 5G CN, to make it more stable and robust: Regularly refactoring and simplifying the code base by relying on the common sub-modules
  - Adding unit tests for main components/libraries
  - Providing bug fixes to make OAI CN more stable and work with a wider range of COTS UE

Roadmap (2)

- **New features/components**
  - Ethernet type PDU session (5G LAN-type services, will soon be released)
  - TLS transport (will soon be released)
  - Traffic steering for Service Function Chaining (will soon be released)
  - Framed Routing (will soon be released)
  - Release 17/18 for NAS/NGAP/PFCP (on-going)
  - Release 17/18 for SBA interfaces (on-going)
  - Interoperability tests with other CNs (on-going)
  - Usage Reporting Rules (URR) for UPF, SMF (on-going)
  - Configure the Core Network Functions with a Dashboard (on-going)
  - ECIES (Elliptic Curve Integrated Encryption Scheme) profile A/B (for SUPI concealment) (on-going)
  - Buffering Action Rule (BAR) for UPF, SMF
  - Time-Sensitive Networking
  - Release of UDSF, NEF
  - Stateless Network Functions for AMF/SMF
  - Multiple PLMNs
  - Charging function

Thank you for your attention!

Q&A!

- Website: https://openairinterface.org/oai-5g-core-network-project/
- Git repository: https://gitlab.eurecom.fr/oai/cn5g